


DIGITAL CLOCK




- Serial, Ethernet and Wi-fi connection. Webserver for monitoring and configuration.
- 100mm digit height, visible up to 50 meters.
- Direct power supply to the electrical network, without battery change.
- Automatic summer/winter time change.
- Possibility of automatic luminosity.
- Alarms with relays.
- Maintenance free and long-term reliable.

Display Configuration

The display has a WEB SERVER and is easily configured. Cable or WIFI connection. Configurable remotely the mobile phone or WIFI AD HOC mode.

General Characteristics

Power supply	100 V to 240V AC. 50/60Hz
Max. Power	15.6 W
Type of fixation	Against the wall
Display	4 dígits of 7 segments. 100mm height + two dots.
Maximum ambient lighting	1000 lux
Protection level	IP41
Measurements	400 x 240 x 60mm
Box material	Thermoformed methacrylate and steel base
Approximate weight	4.5 Kg
Work temperature	-10 to 50 °C
Storage temperature	-20 to 60 °C
Humidity	5 to 95% no condensation
Measurements	
A = 400 mm B = 240 mm C = 60 mm	
Optional codes	
Optional codes	

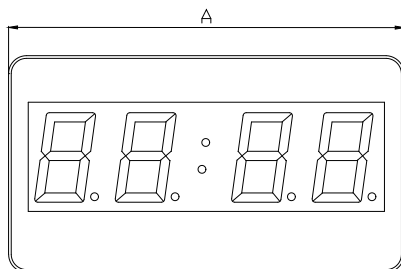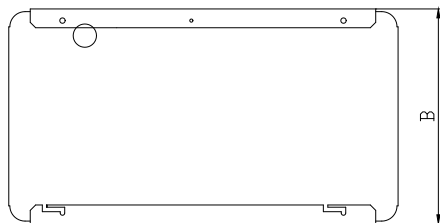

DC-10SRV2   **OPTIONAL:**
A = GPS