


**DAYS WITHOUT ACCIDENTS DISPLAY**

- Serial, Ethernet and Wi-fi connection. Webserver for monitoring and configuration.
- 100mm digit height, visible up to 50 meters.
- High quality screen printed signs.
- Automatic summer/winter time change.
- Direct power supply to the electrical network, without changing batteries.
- Programmable on and off
- Alarms with relays.

**Display configuration**

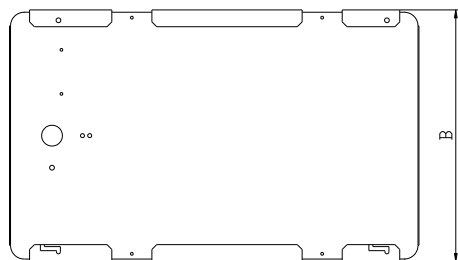
The display has a WEB SERVER and is easily configured. Cable or WIFI connection. Configurable remotely  
Mobile phone or WI-FI ADHOC mode.

**General Characteristics**

Power supply	100 V to 240V AC. 50/60Hz
Max. Power	10.3 W
Type of fixation	Against the wall
Display	4 digits of 7 segments. 100mm digit height
Maximum ambient lighting	1000 lux
Protection level	IP41
Clock Error	< 2s /month
Box material	Thermoformed metacrylate and steel base
Approximate weight	6 Kg
Work temperature	-10 to 50 °C
Storage temperature	-20 to 60 °C
Humidity	5 to 95% no condensation

**Measurements**

A = 518mm B = 320 mm C = 60 mm

**Optional codes**

**DC-23S4V2AC**
